

## Approximate solution of the wave equation using the Multigrid Method

Maicon F. Malacarne<sup>1</sup>, Marcio A. V. Pinto<sup>2</sup>, Sebastião R. Franco<sup>3</sup>

<sup>1</sup>Graduate Program on Numerical Methods in Engineering - PPGMNE, Federal University of Parana - UFPR  
81530-000, Cel. Francisco H. dos Santos Ave, 100 - Jardim das Américas, Curitiba - PR, Brazil  
maicon.unicentro@hotmail.com

<sup>2</sup>Department of Mechanical Engineering, Federal University of Parana - UFPR  
81530-000, Cel. Francisco H. dos Santos Ave, 100 - Jardim das Américas, Curitiba - PR, Brazil  
marcio\_villela@ufpr.br

<sup>3</sup>Department of Mathematics, State University of Centro-Oeste - UNICENTRO  
84505-677, Professora Maria Roza Zanon de Almeida St - Engenheiro Gutierrez, Irati - PR, Brazil  
romero@unicentro.br

**Abstract.** In order to obtain the solution of the wave equation, the problem is discretized using the Finite Difference Method (FDM). The discretization of the temporal direction is performed using the Time-Stepping Method. Thus, it is a system of equations that involves spatial variables and is solved at every step of the time, which in real problems, is usually a big variation. Using a conventional solver, such as Gauss-Seidel, to obtain the solution of such systems, convergence factors are very close to the unit, which often implies a very high computational time. To accelerate the convergence and decrease the computational time, it was proposed to use the Multigrid Method to obtain the solution of the system of equations. Multigrid was initially proposed for elliptical problems, but it has been used successfully in some parabolic and hyperbolic problems. This work deals especially with waves in strings (1D), where a new approach is proposed to solve this class of problems.

**Keywords:** mechanical waves; finite difference method; hyperbolic equation.

### 1 Introduction

There are several Engineering problems modeled by differential equations, which can be classified as elliptical, parabolic or hyperbolic, in which it is generally not possible to obtain an analytical solution. Therefore, approximate methods are the main strategy. According to Dehghan and Mohebbi [1], hyperbolic partial differential equations (PDE) model several physical phenomena, from macrocosmic models, such as the vibration of structures, to microscopic models, which are used in atomic physics. Thus, Engineering problems involving this type of equation are recurrent in the literature. Some of these applications are found in Devi et al. [2] in the telegraphic equation, De Sterck et al. [3] in systems of equations for advection and linear elasticity, Dehghan and Mohebbi [1] in wave propagation in the linear case, Rincon and Quintino [4] in the non-linear case, Avalos and Lasiecka [5] in applications in structural acoustics, Metaxas and Meredith [6] in the propagation of electric charges, and also in Bailly and Juve [7] in sound waves.

In this context, an approximate solution for the wave equation is presented, which consists of a hyperbolic PDE, with several applications that are linked to the propagation of different types of mechanical and electromagnetic waves, such as sound waves, vibration of membranes, strings, sea waves, geological prospecting, x-rays, radar, microwaves, among others. According to Cuminato and Meneguette [8], hyperbolic equations differ from parabolic and elliptical equations, since their solution is often less smooth than the problem data, so the discontinuities are carried without smoothing, which may cause the formation of singularities, even with well-behaved initial data.

This work presents computational simulations of the one-dimensional wave equation (1D). The domain discretization is performed using the Finite Difference Method (FDM), presented by Cuminato and Meneguette [8], which results in a system of implicit equations, which when solved produces a fourth order method. Some of

the variations in the approach to the wave equation are found in the works of Gopal et al. [9] on polar coordinates, Melo [10] on elastic waves, and Brandt and Livshits [11] on stationary form.

The approximate solution to the wave equation is obtained by sweeping time with the Time-Stepping Method (TS). In this method, the discretized system in the spatial direction is solved in each time step until reaching a stopping criterion. The process is repeated until the final time step, using the solution in the previous time step as an initial estimate, Burden and Faires [12], Lent [13]. The Multigrid Method (MG) is used to accelerate the convergence of the system of equations in each time step, since it allows the smoothing of the oscillatory modes when using a set of meshes, Trottenberg et al. [14], Brandt and Livne [15].

## 2 Mathematical and Numerical Model

### 2.1 Wave equation

The 1D vibration problem of a string fixed at its ends is summarized in finding the displacement  $u(x, t)$  with the independent variables  $x$  and  $t$  respectively representing position and time. Assuming a positive scalar  $\alpha$ , such that  $\alpha^2 = \frac{1}{V^2}$ , where  $V$  is related to the linear density and tension in the string, we define the wave equation, Olver [16], as

$$\frac{\partial^2 u}{\partial t^2} = \alpha^2 \frac{\partial^2 u}{\partial x^2}, \quad (1)$$

$$u(x, 0) = f(x), 0 \leq x \leq 1, \quad (2)$$

$$u_t(x, 0) = g(x), 0 \leq x \leq 1, \quad (3)$$

$$u(0, t) = u(1, t) = 0, t > 0, \quad (4)$$

where  $f(x)$  is the initial string configuration,  $g(x)$  is the initial velocity,  $u(0, t)$  and  $u(1, t)$  are dirichlet boundary conditions. Given the above, the analytical solution of the problem is given by

$$u(x, t) = \frac{1}{2}[f(x + \alpha t) + f(x - \alpha t)] + \frac{1}{2\alpha} \int_{x-\alpha t}^{x+\alpha t} g(y) dy. \quad (5)$$

### 2.2 Discretization 1D

Consider the problem defined by the eqs. (1) to (4). The size of each spatial element is defined by  $h = \frac{L}{N_x}$  and an increase in time  $\tau = \frac{t_f}{N_t}$ , where  $N_x > 0$  and  $N_t > 0$ , respectively, the number of spatial and temporal intervals, with final time  $t_f > 0$  and string length  $L$ . Admitting an approximation  $v$  for the solution  $u$ , with  $x_i = ih$  and  $t_k = k\tau$ , for the node  $i$  and the time  $k$ . Then the problem can be discretized by using the FDM.

$$\frac{v_i^{k-1} - 2v_i^k + v_i^{k+1}}{\tau^2} = \frac{\alpha^2}{h^2} [(\eta)(v_{i-1}^{k+1} - 2v_i^{k+1} + v_{i+1}^{k+1}) + (1-2\eta)(v_{i-1}^k - 2v_i^k + v_{i+1}^k) + (\eta)(v_{i-1}^{k-1} - 2v_i^{k-1} + v_{i+1}^{k-1})], \quad (6)$$

where  $\eta$  is a parameter of the method. By adopting  $\eta > 0.25$  we have an unconditionally stable approach, Cuminato and Meneguette [8]. In this work,  $\eta = 0.5$  was adopted, as it was empirically verified that this choice reduces discretization error and computational time. By reordering the terms of eq. (6), we have

$$v_i^{k-1} - 2v_i^k + v_i^{k+1} = \frac{\alpha^2 \tau^2}{h^2} \left[ \frac{1}{2}(v_{i-1}^{k+1} - 2v_i^{k+1} + v_{i+1}^{k+1} + v_{i-1}^{k-1} - 2v_i^{k-1} + v_{i+1}^{k-1}) \right], \quad (7)$$

or still, assuming that  $\lambda = \frac{\alpha\tau}{h}$ , we obtain

$$a_p v_i^{k+1} = a_w v_{i-1}^{k+1} + a_e v_{i+1}^{k+1} + bp, \quad (8)$$

thus, the system of linear equations generated has its coefficients and source term given by

$$a_p = 1 + \lambda^2, \quad (9)$$

$$a_w = a_e = \frac{\lambda^2}{2}, \quad (10)$$

$$b_p = (-1 - \lambda^2)(v_i^{k-1}) + 2v_i^k + \frac{\lambda^2}{2}(v_{i-1}^{k-1} + v_{i+1}^{k-1}). \quad (11)$$

In order to calculate  $v_i^{k+1}$  it is necessary to know the solution in two previous time steps  $v_i^k$  and  $v_i^{k-1}$ . To start the process,  $v_i^{k-1}$  is given by the initial configuration and  $v_i^k$  is given in Burden and Faires [12] by

$$v_i^k = (1 - \lambda^2)f(x_i) + \frac{\lambda^2}{2}f(x_{i+1}) + \frac{\lambda^2}{2}f(x_{i-1}) + \tau g(x_i). \quad (12)$$

### 3 Multigrid Method

The Multigrid method is a technique commonly adopted by a number of researchers when solving  $Au = f$  equation systems, which regularly require high computational cost, Fedorenko [17] [18], Franco et al. [19], Wesseling [20], Pinto et al. [21]. The Multigrid uses a basic iterative method named solver to smooth high and low frequency errors. This is possible due to the use of several meshes, as some of the modes that are smooth in fine meshes become oscillatory in coarse meshes, Trottenberg et al. [14].

In this work, the V-cycle is used to go through the grids, Briggs et al. [22]. An equation is smoothed  $\nu_1$  times (pre-smoothing) in the fine grid. Then, its residue is restricted to the coarse grid with the restriction operator by full weighting, in which the residual equation is smoothed. The process is repeated until reaching the coarsest grid, where the problem is solved. In this case, a standard coarsening ratio is used, that is,  $q = 2$ . After that, the ascent process begins and the residual equation solution is prolonged by using a linear interpolation operator. The solution is then corrected and smoothed  $\nu_2$  times (post-smoothing), and the process is repeated until reaching the finest grid  $\Omega^h$ , Briggs et al [22], Oliveira et al. [23]. This process is illustrated by Fig. 1.

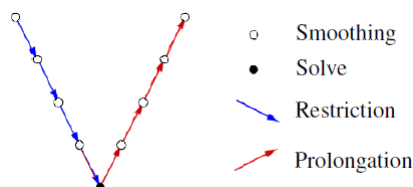


Figure 1. Multigrid V-cycle

This approach allows the iterative process of the Multigrid method to always act on the oscillating components of the errors, Franco et al. [24]. In this work  $\nu_1 = \nu_2 = 2$  was adopted, as according to Dehghan and Mohebbi [1] this is a choice that produces satisfactory results to the wave equation.

## 4 Results

This section presents code verification techniques based on numerical simulations and *a posteriori* analysis of the results obtained by using the Multigrid and Singlegrid (SG), with the Gauss-Seidel solver in lexicographical ordering, Adms et al. [25]. The problem of wave propagation on a string, modeled by the eqs. (1) to (4) is solved by admitting  $\alpha = 2$ , with the initial configuration  $f(x) = \sin(\pi x)$  and initial speed  $g(x) = 0$ . The tests were performed on a computer with an Intel Core i3 1.5 GHz processor, 4 GB of RAM, and 64-bit Windows 10 operating system.

### 4.1 Discretization error

The same number of points is adopted in the spatial and temporal discretization  $N = N_x = N_t$ , parameter  $\eta = 0.5$ , time  $t_f = 1.0s$ , with double precision and the stop criterion based on rounding error in order to minimize

iteration error. In order to verify the behavior of discretization errors, the infinity norms of the errors, see Burden and Faires [12], with  $Error = |u - v|$  are presented in Fig. 2.

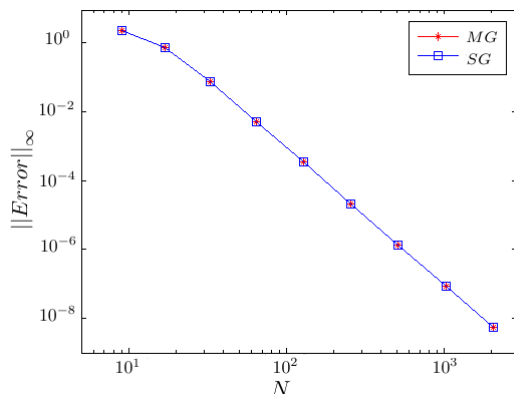


Figure 2. Discretization error for Singlegrid and Multigrid methods versus  $N$

#### 4.2 Effective and apparent orders

Numerical solutions can be verified using the effective order  $P_E$  and the apparent order  $P_U$ , Dehghan and Mohebbi [1], Anunciação et al. [26]. Richardson’s estimator is also used based on the apparent order of the numerical error, given by

$$P_U = \frac{\log\left(\frac{\phi_2 - \phi_3}{\phi_1 - \phi_2}\right)}{\log(q)} \tag{13}$$

where  $\phi_1, \phi_2$  and  $\phi_3$  respectively indicate the solutions in the fine, coarse and extra coarse grids, for point  $x = 0.5$ . When the analytical solution is known,  $P_E$  is calculated by

$$P_E = \frac{\log\left(\frac{Error(\phi_2)}{Error(\phi_1)}\right)}{\log(q)} \tag{14}$$

where  $Error(\phi_2)$  e  $Error(\phi_1)$  respectively represent the errors in the coarse and fine grids in the  $x = 0.5$ . In Fig. 3 depicts the values of the effective and apparent orders for different grids.

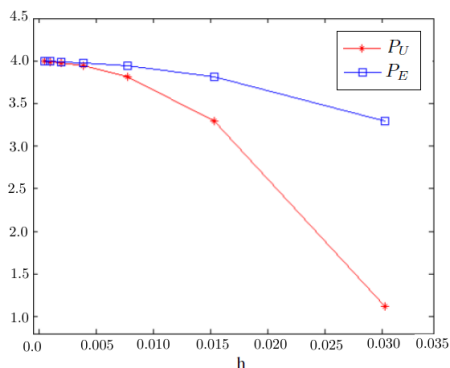


Figure 3. Effective and apparent orders

The Fig. 3 shows that  $P_U$  and  $P_E$  tend to 4.0. Therefore, the model presented in eqs. (6) to (11) generates a high order method, which is a desired characteristic in approximate methods. By refining the mesh at a  $q = 2$  coarsening rate the discretization error is reduced 16 times.

### 4.3 Complexity order

According to Burden and Fairies [12], by taking into account the results of the computational  $t_{cpu}$  it is possible to perform a geometric (or non-linear) fit in order to verify the complexity of the algorithm used, where

$$t_{cpu} = c.N^p \tag{15}$$

and  $c$  is the coefficient related to the method,  $p$  represents the order of complexity of the solver associated with the slope of the fit curve, and  $N$  is the dimension of the problem. Theoretically, according to Trottenberg et al. [14],  $p$  must be close to the unit when employing the Multigrid method, indicating its linear behavior. Table 1 shows the results of these parameters for different values of  $\lambda$  in Singlegrid and Multigrid.

Table 1. Parameters of the geometric fit

$\lambda$	SG		MG	
	$c$	$p$	$c$	$p$
$10^0$	1.00E-05	0.9723	1.00E-05	0.8941
$10^1$	2.00E-05	1.0364	7.00E-06	0.9559
$10^2$	4.00E-05	1.1175	2.00E-05	0.9249
$10^3$	5.00E-05	1.2558	3.00E-05	0.9161
$10^4$	7.00E-06	1.5312	4.00E-05	0.9012
$10^5$	3.00E-06	1.7894	5.00E-05	0.9421

It can be seen that as  $\lambda$  increases,  $p$  of Singlegrid presents values close to 2 and  $p$  of Multigrid tends to 1.

### 4.4 Convergence factor

In order to verify which intervals and values of the variables were used in the calculations, the parameter  $\lambda$  and the convergence factor  $\rho$  were considered, with  $\rho = ||res(it)||_{\infty} / ||res(it - 1)||_{\infty}$ , with  $||res(it)||_{\infty}$  the infinity norm of residue in iteration  $it$ , see Briggs et al. [22]. According to Horton and Vandewalle [27], Thole and Trottenberg [28],  $\lambda$  can be considered as a measure of the degree of anisotropy in the operator discretized in a given mesh. Such anisotropy can affect the performance of solvers. This approach can also be used to find the intervals of  $\lambda$ , where Multigrid and Singlegrid are most efficient. This indicator is calculated for different meshes, as shown in Fig 4.

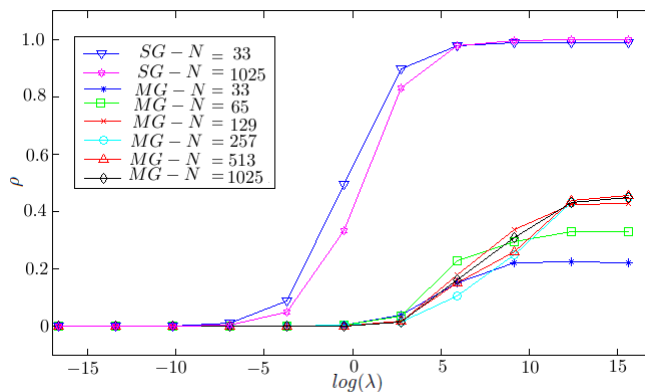


Figure 4. Convergence factor

It can be verified that for  $\log(\lambda)$  values inferior to 0, both Multigrid and Singlegrid present small values of  $\rho$ , which implies a high convergence. As  $\log(\lambda)$  becomes greater than 0, Singlegrid presents  $\rho$  values close to 1, that

is, it is inefficient in this interval, Franco et al. [24]. However, the convergence factor of the Multigrid presents  $\rho$  values close to 0.45, making it more efficient.

It is also observed that for all the parameters that compose  $\alpha$ , the Multigrid method presents values of the convergence factor  $\rho$  inferior to 0.5. Therefore, this method can be considered robust for the solution of the wave equation.

#### 4.5 Speed-up

The ratio between the computational time of the Singlegrid ( $t_{cpuSG}$ ) and that of the Multigrid ( $t_{cpuMG}$ ) is given by  $\text{Speed-up} = t_{cpuSG}/t_{cpuMG}$ , see in Fig. 5.

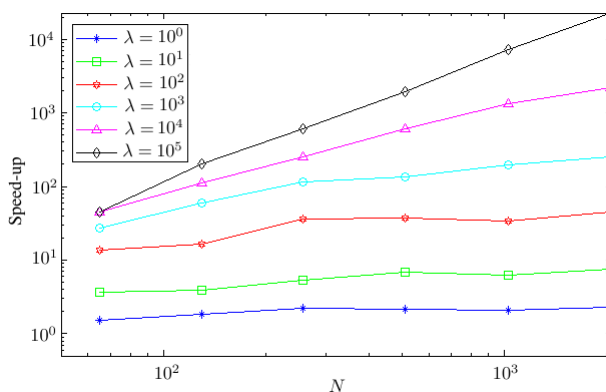


Figure 5. Ratio between the  $t_{cpu}$  of the Multigrid and Singlegrid methods

It is noted that  $t_{cpuMG}$  is lower than  $t_{cpuSG}$  and that the Speed-up increases considerably for large values of  $\lambda$ . For instance, for  $\lambda = 10^4$  in a mesh with  $N = 2049$ , there is a  $t_{cpuMG} = 30.1s$  and  $t_{cpuSG} = 65977.3s$ , that is,  $\text{Speed-up} = 2191.9$ .

### 5 Conclusions

When solving the 1D problem of wave propagation on a string, with discretization given by the eqs. (9) to (11), there is a fourth order scheme confirmed by the orders  $P_U$  and  $P_E$ . When solving the resulting equation system with the Singlegrid and Multigrid methods with the lexicographic Gauss-Seidel solver, discretization errors close to the analytical solution may be found. By analyzing the complexity, convergence factors and the computational time of the Multigrid and Singlegrid methods, it can be said that the use of the Multigrid is more appropriate in cases where the problem has  $\log(\lambda) > 0$ , whereas the Singlegrid is recommended for cases in which  $\log(\lambda) < 0$ . Thus, a robust algorithm is generated for the solution of the wave equation, regardless of the parameters adopted. It is suggested that further studies extend the approach proposed in this work to other hyperbolic problems.

### References

- [1] Dehghan, M. & Mohebbi, A., 2008. The combination of collocation, finite difference, and multigrid methods for solution of the two-dimensional wave equation. *Numerical Methods for Partial Differential Equations: An International Journal*, vol. 24, n. 3, pp. 897–910.
- [2] Devi, V., Maurya, R. K., Singh, S., & Singh, V. K., 2020. Lagrange’s operational approach for the approximate solution of two-dimensional hyperbolic telegraph equation subject to dirichlet boundary conditions. *Applied Mathematics and Computation*, vol. 367, pp. 124717.
- [3] De Sterck, H., Friedhoff, S., Howse, A. J., & MacLachlan, S. P., 2020. Convergence analysis for parallel-in-time solution of hyperbolic systems. *Numerical Linear Algebra with Applications*, vol. 27, n. 1, pp. e2271.
- [4] Rincon, M. A. & Quintino, N., 2016. Numerical analysis and simulation for a nonlinear wave equation. *Journal of Computational and Applied Mathematics*, vol. 296, pp. 247–264.
- [5] Avalos, G. & Lasiecka, I., 1996. Differential riccati equation for the active control of a problem in structural acoustics. *Journal of Optimization Theory and Applications*, vol. 91, n. 3, pp. 695–728.

- [6] Metaxas, A., & Meredith, R. J., 1983. *Industrial microwave heating*. Number 4. IET.
- [7] Bailly, C. & Juve, D., 2000. Numerical solution of acoustic propagation problems using linearized euler equations. *AIAA journal*, vol. 38, n. 1, pp. 22–29.
- [8] Cuminato, J. A. & Meneguette, M., 2013. *Discretization of partial differential equations: finite difference techniques (in Portuguese)*. Brazilian Mathematical Society.
- [9] Gopal, V., Mohanty, R., & Jha, N., 2013. New nonpolynomial spline in compression method of for the solution of 1d wave equation in polar coordinates. *Advances in Numerical Analysis*, vol. 2013.
- [10] Melo, A. R. d., 2017. High-order and high-resolution method of spatial-temporal conservation elements to solve hyperbolic problems (in Portuguese) thesis. *Federal University of Parana*.
- [11] Brandt, A. & Livshits, I., 1997. Wave-ray multigrid method for standing wave equations. *Electron. Trans. Numer. Anal.*, vol. 6, n. 162-181, pp. 91.
- [12] Burden, R. & Faires, J., 2016. Numerical analysis 10/e ie. *Brooks/Cole Cengage Learning*.
- [13] Van Lent, J., 2006. Multigrid methods for time-dependent partial differential equations. thesis. leuven: Katholieke universiteit, (2006) 204 p.
- [14] Trottenberg, U., Oosterlee, C. W., & Schuller, A., 2000. *Multigrid*. Elsevier.
- [15] Brandt, A. & Livne, O. E., 2011. *Multigrid techniques: 1984 guide with applications to fluid dynamics*, volume 67. SIAM.
- [16] Olver, P. J., 2014. *Introduction to partial differential equations*. Springer.
- [17] Fedorenko, R. P., 1962. A relaxation method for solving elliptic difference equations. *USSR Computational Mathematics and Mathematical Physics*, vol. 1, n. 4, pp. 1092–1096.
- [18] Fedorenko, R. P., 1964. The speed of convergence of one iterative process. *USSR Computational Mathematics and Mathematical Physics*, vol. 4, n. 3, pp. 227–235.
- [19] Franco, S. R., Gaspar, F. J., Pinto, M. A. V., & Rodrigo, C., 2018a. Multigrid method based on a space-time approach with standard coarsening for parabolic problems. *Applied Mathematics and Computation*, vol. 317, pp. 25–34.
- [20] Wesseling, P., 1995. Introduction to multigrid methods. *Institute for Computer Applications in Science and Engineering; Hampton, VA, United States*.
- [21] Pinto, M. A. V., Rodrigo, C., Gaspar, F. J., & Oosterlee, C., 2016. On the robustness of ilu smoothers on triangular grids. *Applied Numerical Mathematics*, vol. 106, pp. 37–52.
- [22] Briggs, W. L., Henson, V. E., & McCormick, S. F., 2000. *A multigrid tutorial*. SIAM.
- [23] Oliveira, M. L., Pinto, M. A. V., Gonçalves, S. d. F. T., & Rutz, G. V., 2018. On the robustness of the xyzebra-gauss-seidel smoother on an anisotropic diffusion problem. *Computer Modeling in Engineering & Sciences*, vol. 117, n. 2, pp. 251–270.
- [24] Franco, S. R., Rodrigo, C., Gaspar, F. J., & Pinto, M. A. V., 2018b. A multigrid waveform relaxation method for solving the poroelasticity equations. *Computational and Applied Mathematics*, vol. 37, n. 4, pp. 4805–4820.
- [25] Adams, M., Brezina, M., Hu, J., & Tuminaro, R., 2003. Parallel multigrid smoothing: polynomial versus gauss–seidel. *Journal of Computational Physics*, vol. 188, n. 2, pp. 593–610.
- [26] Anunciação, M. A. M., Pinto, M. A. V., & Neundorff, R. L. A., 2020. Solution of the navier-stokes equations using projection method and preconditioned conjugated gradient with multigrid and ilu solver. *Revista Internacional de Métodos Numéricos para Cálculo y Diseño en Ingeniería*, vol. 36, n. 1.
- [27] Horton, G. & Vandewalle, S., 1995. A space-time multigrid method for parabolic partial differential equations. *SIAM Journal on Scientific Computing*, vol. 16, n. 4, pp. 848–864.
- [28] Thole, C.-A. & Trottenberg, U., 1986. Basic smoothing procedures for the multigrid treatment of elliptic 3d operators. *Applied Mathematics and Computation*, vol. 19, n. 1-4, pp. 333–345.